

HYUNDAI


Característica	U.M.	70L-7A
Carac.Principal		
Capacidade de carga	kg	7.000
Dados Operacionais		
Altura máxima de trabalho	mm	7.330
Carga máxima de tombamento	kg	Não Informado
Carga na altura máxima	kg	5.750
Raio de giro (externo aos pneus)	mm	3.370
Velocidade de descida	m/min	30
Velocidade de elevação	m/min	25,80
Velocidade máxima de translação	km/h	22,40
Motor		
Marca/modelo		PSI 4.3L
Potência	HP/rpm	78 kW / 2,300 rpm
Tipo de acionamento (elétrico/diesel/gás)		Gás
Transmissão		
Tipo (mecânica/hidrostop/powershift)		Powershift
Tração (4x2 / 4x4)		4 x 2

Pesos e dimensões

Altura livre sobre o solo	mm	195
Dimensões para transporte (CxLxA)	mm	3.680 x 2.088 x 2.533
Peso total com garfo	kg	9.430

Dados gerais

Código Finame		Não aplicável
País de origem		Coreia do sul
Pneus (tipo)		Pneumático, poliuretano
Preço de Referência	R\$	Não Informado
Segmentos de torre		Duplex / triplex
Sistema de freio (tipo)		Freio banhado a óleo (Wet disc brake system)

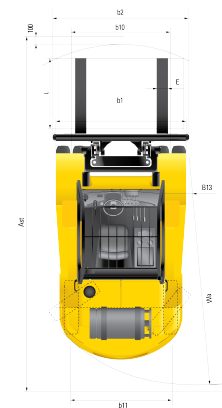

Identification	
Load capacity / rated load	Q (kg) 7 000
Load center distance	c (mm) 600
Load distance: center of drive axle to fork	x (mm) 615
Wheelbase	y (mm) 2 300
Wheels, Chassis	
Track width, front	b(3) (mm) 1 578
Track width, rear	b(1) (mm) 1 664
Basic Dimensions	
Mast / Fork carriage lift forward / backward (at 0°)	degrees 15 / 10
Lowered mast height	h(1) (mm) 2 515
Fork lift	h(2) (mm) 140
Lift height	h(3) (mm) 3 030
Extended mast height	h(4) (mm) 4 320
Overhead load guard (stable) height	h(5) (mm) 2 533
Seat height / standing height	h(7) (mm) 1 455
Coupling height	h(10) (mm) 511
Overall length	l (mm) 4 800
Length to base of forks	l(2) (mm) 3 660
Overall width	b(1) (mm) 2 088
Fork dimensions	b(7) / (mm) 65 × 150 × 1 200
Fork carriage width	b(2) (mm) 2 058
Ground clearance, loaded, under mast	m(1) (mm) 195
Ground clearance, center of wheelbase	m(2) (mm) 206
Axle width for axles 1000x1200 crisscrosses	As(1) (mm) 5 185
Axle width for axles 800x1200 crisscrosses	As(2) (mm) 5 385
Turning radius	Wa (mm) 3 310
Smallest quiet point distance	b(3) (mm) 1 224